



Product Information  
Version 1.0

## **ZEISS Axiocam 506 mono**

Your High Resolution Microscope Camera for Live Cell Imaging  
– Fast, Flexible, and Sensitive



We make it visible.

# Technical Specifications

› **Technology and Details**

› Service

**ZEISS Axiocam 506 mono**

<b>Sensor Model</b>	Sony ICX 694, EXview HAD CCD II™ Progressive Scan Quad-Port Readout Selected sensor quality
<b>Sensor Pixel Count</b>	6 Megapixel: 2752 (H) x 2208 (V)
<b>Pixel Size</b>	4.54 µm x 4.54 µm
<b>Sensor Size</b>	Effective sensor size: 12.5 mm x 10.0 mm; image diagonal 16 mm, equivalent to 1" sensor format
<b>Spectral Sensitivity</b>	Approx. 400 nm – 1000 nm, annealed BK 7 protective glass
<b>Max Full Well Capacity (typical)</b>	15.000 e-
<b>Signal Amplification</b>	Adjustable analog amplification: 1x, 2x, 3x
<b>Readout Speed</b>	39 MHz, 13 Mhz
<b>Readout Noise (typical)</b>	6,5 e- at 39 Mhz 6,0 e- at 13 Mhz
<b>Dynamic Range (typical)</b>	1:2500 (68 dB)
<b>Digitization</b>	14 Bit / Pixel
<b>Dark Current (typical)</b>	<0,06 e-/p/s at 18 °C sensor temperature
<b>Cooling</b>	Regulated Peltier-cooling (power supply via USB 3.0 and USB 2.0) Sensor temperature 18 °C
<b>Dark Current Compensation</b>	Digital dark current compensation for optimum low light performance at long exposure times Automatic hot pixel correction
<b>Exposure Time Range</b>	250 µs to 60 s

# Technical Specifications

› **Technology and Details**

› Service

Binning Modes and Frame Rates	Binning	Pixel Count (H x V)	Mode	FPS @ 1 ms
	1x1	2752 x 2208	Mono	20
	2x2	1376 x 1104	Mono	34
	3x3	912 x 736	Mono	44
	4x4	688 x 552	Mono	52
	5x5	544 x 440	Mono	58
	ROI	2752 x 1080	Mono/Center	33
	ROI	2752 x 512	Mono/Center	50
(exposure time < readout time)				
<b>Color Interpolation Modes</b>	n.a.			
<b>Live Frame Rates</b>	<b>Max. Frame Rate</b>	<b>Binning factor / Mode</b>	<b>Resolution / Pixel</b>	
Maximum ratings at optimum hardware settings	19 frames/s	1 / slow	2752 x 2208	
	33 frames/s	2 / medium	1376 x 1104	
	51 frames/s	3 / fast	912 x 736	
<b>Data-Post Processing (optional)</b>	Objective specific shading correction			
	Sharpening			
	Black reference, dark current compensation			
	Noise filter			
<b>Special Features</b>	Time stamp from camera for precise acquisition time point			
	Auto Switch Mode für Single Port / Dual Port / Quad Port Readout			
	Adjustable intensity of status LED			
<b>Special Preset Modes</b>	Eight pre-loadable sets of imaging parameters for speed optimized multi modal image acquisition			
	Overlapping exposure and readout for fast time lapse imaging			
	Single Port Readout for long exposure times for maximum signal quality			
	Dual Port or Quad Port Readout for improved readout speed at full resolution			
	Automatic port activation mode or full manual mode			

# Technical Specifications

› **Technology and Details**

› Service

<b>Region of Interest (ROI)</b>	User defined imaging sub area for improvement of readout speed and reduction of amount of data
<b>Hardware Trigger</b>	Galvanic isolated I/O-signals  Three output signals: exposure time, readout time, trigger ready, i.e. for controlling external mechanical shutters  One trigger input for exposure control, 5V auxiliary voltage, GND
<b>Status LED</b>	Top LED: camera status (acquisition, power, cooling, speed)  Back LED: trigger status
<b>Interface</b>	USB 3.0 SuperSpeed (5 Gbit/s)  Bandwidth max. 240 Mbytes/s  USB 2.0 optional, with lower speed
<b>Optical Interface</b>	C-Mount
<b>Max. File Size per Image</b>	Approx. 12.2 MB per image with 2752 x 2208 Pixels at 14 Bit/Pixel
<b>Operating Systems</b>	Microsoft® Windows 7 Enterprise and higher
<b>Size (W x H x D) / Weight</b>	10.8 cm x 4.3 cm x 7.8 cm / 500 g
<b>Housing</b>	Blue anodized aluminum  ¼" thread for camera equipment  Zero vibration by convection-cooling, optimized cooling fins  Teflon coated C-Mount thread  Annealed protection glass
<b>Certificates</b>	CE
<b>Power Supply</b>	7 W power consumption, power supply camera: USB 3.0, power supply Peltier-cooling: USB 2.0  For maximum performance connection to USB 3.0 and USB 2.0 required  Dual connection cabling provided with delivery
<b>Ambient Conditions (Operation)</b>	+5 °C ... +35 °C  Max. 80% relative humidity, non-condensing  Free air circulation required

# Technical Specifications

› **Technology and Details**

› Service


Ambient Conditions (Storage)	-15 °C ... +60 °C
	90% rrelative humidity at +40 °C, 80% relative humidity at +20 °C, non-condensing
Operating system	Microsoft® Windows 7 x64 (Enterprise, Ultimate) and higher
Software	ZEN lite 2012 SP 2

*All frame rates are maximum values at short exposure times below readout time of the sensor. Exposure time, computer hardware operating system and software can reduce the maximum achievable frame rates. By using binning or sensor sub regions (ROI), the frame rates can be further increased. Technical data is subject to changes due to technical progress.*

# Technical Specifications

› Technology and Details

› Service

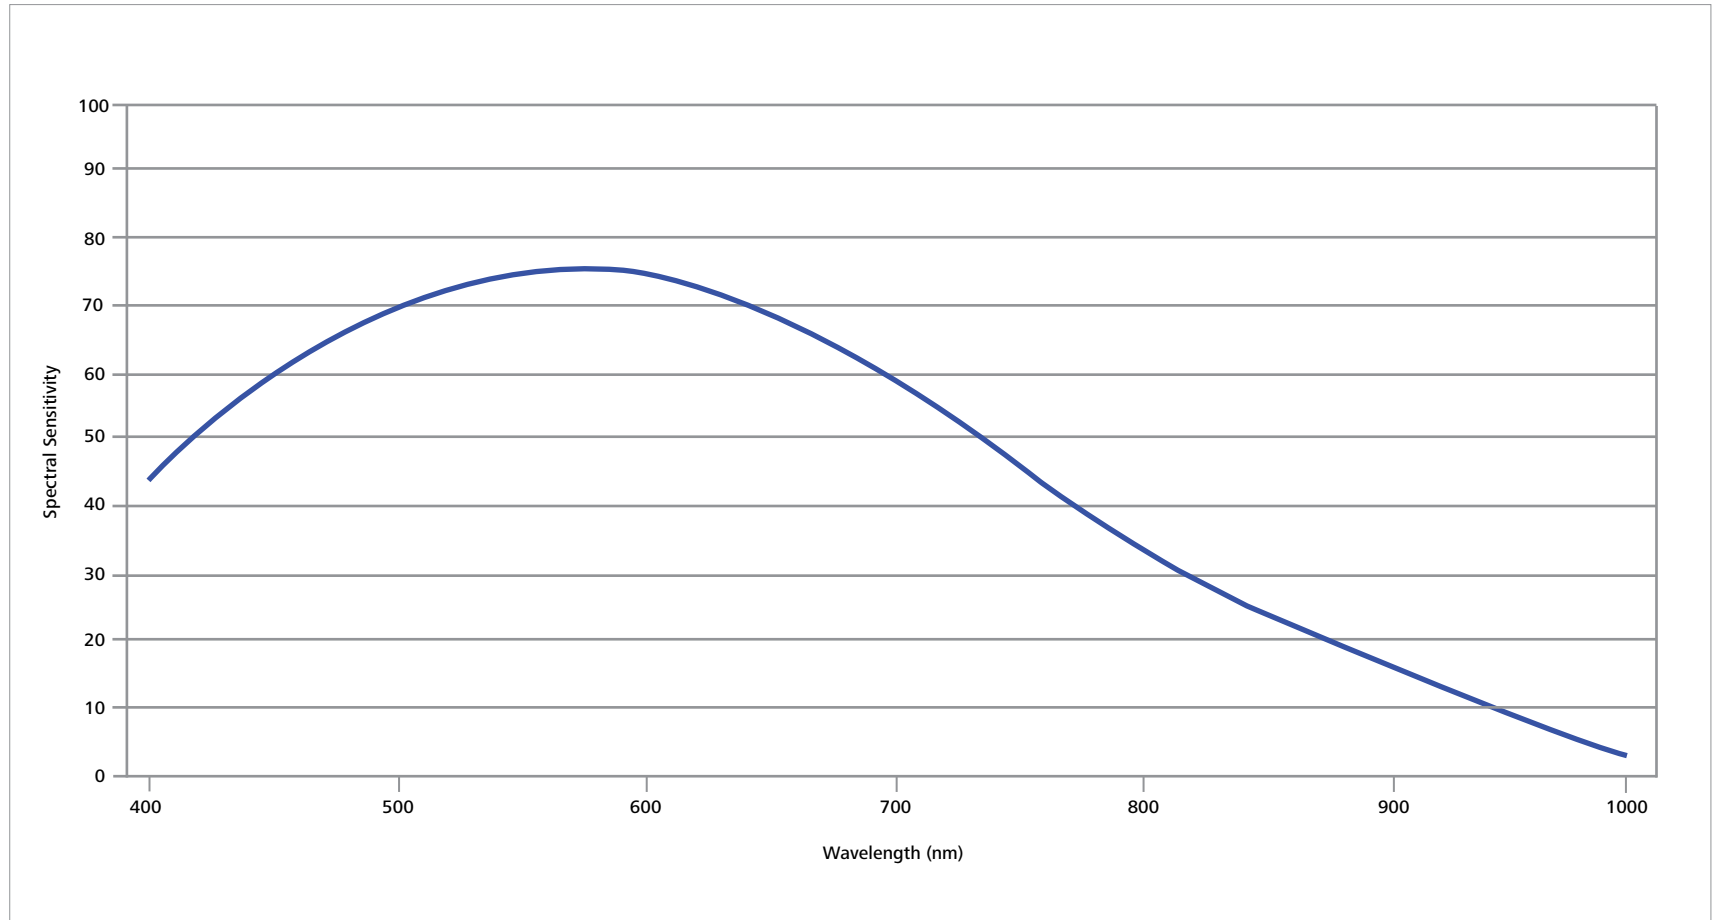

# Count on Service in the True Sense of the Word

› Technology and Details

› **Service**

Because the ZEISS microscope system is one of your most important tools, we make sure it is always ready to perform. What's more, we'll see to it that you are employing all the options that get the best from your microscope. You can choose from a range of service products, each delivered by highly qualified ZEISS specialists who will support you long beyond the purchase of your system. Our aim is to enable you to experience those special moments that inspire your work.

## **Repair. Maintain. Optimize.**

Attain maximum uptime with your microscope. A ZEISS Protect Service Agreement lets you budget for operating costs, all the while reducing costly downtime and achieving the best results through the improved performance of your system. Choose from service agreements designed to give you a range of options and control levels. We'll work with you to select the service program that addresses your system needs and usage requirements, in line with your organization's standard practices.

Our service on-demand also brings you distinct advantages. ZEISS service staff will analyze issues at hand and resolve it – whether using remote maintenance software or working on site.

## **Enhance Your Microscope System.**

Your ZEISS microscope system is designed for a variety of updates: open interfaces allow you to maintain a high technological level at all times. As a result you'll work more efficiently now, while extending the productive lifetime of your microscope as new update possibilities come on stream.

Please note that our service products are always being adjusted to meet market needs and maybe be subject to change.



*Profit from the optimized performance of your microscope system with services from ZEISS – now and for years to come.*

>> [www.zeiss.com/microservice](http://www.zeiss.com/microservice)

The moment your data change scientific minds.  
**This is the moment we work for.**

› Technology and Details

› Service



// RECOGNITION  
MADE BY ZEISS





**Carl Zeiss Microscopy GmbH**  
07745 Jena, Germany  
BioSciences & Materials  
microscopy@zeiss.com  
www.zeiss.com/axiocam



MicroscopeWorld

info@microscopeworld.com | 800-942-0528



We make it visible.